

exposupply

# Truss lighting





RENO  
Floodlight 150 Watt

# Truss Lighting: Powerful, Flexible, and Exhibition-Ready

## **High Output Illumination**

Floodlights cover large areas, while PAR lights add focused beams for accents and effects.

## **Safe and easy Mounting**

Designed with clamps and safety gear for quick, secure installation on truss systems.

## **Adaptable Colour & Beam Control**

Choose from different colour temperatures and beam options to match any stand design.

## **Durable & Easy to use**

Robust LED fixtures ensure low power use, long life, and reliable performance at every event.

# Which Truss light do I need?

Select the truss lighting that is most suitable for your application.

**Do you have a question?**

Please contact us!

[Info@exposupply.com](mailto:Info@exposupply.com)


[+31 \(0\)85 273 64 21](tel:+3120852736421)



Type	RENO 150	ERON 100	ERON 200	ODIN 200	ODIN 200 <sup>RGB</sup>	ODIN 300
						
<b>Power</b>	150 W	100 W	200 W	200 W	200 W	300 W
<b>Barndoors</b>	Integrated	Not suitable	Not suitable	Included	Included	Included
<b>Max. linkable</b>	16	10	5	6	6	4
<b>Beam angle</b>	90°	90°	90°	25° - 65° Fresnel	25° - 65° Fresnel	20° - 60° Fresnel
<b>Color temperature</b>	Tri-Color (3000K + 4000K + 5700K)	Tri-Color (3000K + 4000K + 5700K)	Tri-Color (3000K + 4000K + 5700K)	Tri-Color (3000K + 4000K + 5700K)	RGB	Tri-Color (3000K + 4000K + 5700K)



# Floodlights



# RENO 150

The powerful, robust and all-round floodlight for exhibition stands



PowerCon In - Out

**3000K / 4000K / 5700K**

- ✓ **TRI-COLOR SWITCH**
- ✓ **POWERCON IN + OUT**
- ✓ **UP TO 18,000 LUMENS**
- ✓ **COMPACT AND ROBUST**



More information

## Specifications

<b>Power</b>	150 W	<b>Input voltage</b>	AC 100 - 277V
<b>Luminous flux</b>	16500 lm	<b>Size</b>	375 x 220 x 235 mm
<b>Beam angle</b>	90°	<b>Safetyring</b>	Integrated
<b>Max. linkable</b>	16	<b>Barndoors</b>	Integrated

# What makes de RENO unique?



## Tri-color

The RENO is equipped with a switch that allows you to easily change the colour temperature between warm, neutral and cool light.




## Easy to install

The lamps can be easily mounted in the desired position using the rotary knobs on the sides.



## Diffuse panel

Using strong magnets, the diffuse panel is clicked into place in front of the lenses of the RENO floodlight to spread the light evenly.



# ERON 100

Compact and powerful lighting for any environment.



PowerCon In - Out

## 3000K / 4000K / 5700K


- ✓ TRI-COLOR SWITCH
- ✓ COMPACT AND SLEEK
- ✓ POWERCON IN + OUT
- ✓ INTEGRATED SAFETY RING



More information

## Specifications

Power	100 W	Input voltage	AC 100 - 277V
Luminous flux	16000 lm	Size	250 x 370 x 50 mm
Beam angle	90°	Safetyring	Integrated
Max. linkable	10	Barndoors	Not applicable



# ERON 200

Extremely powerful floodlight for use in stand construction with 3 color temperatures



PowerCon In - Out

**3000K / 4000K / 5700K**

- ✓ UP TO 32000 LUMENS
- ✓ TRI-COLOR SWITCH
- ✓ POWERCON IN + OUT
- ✓ COMPACT AND ROBUST




More information

## Specifications

Power	200 W	Input voltage	AC 100 - 277V
Luminous flux	32000 lm	Size	320 x 460 x 55 mm
Beam angle	90°	Safetyring	Integrated
Max. linkable	5	Barndoors	Not applicable



# What makes de ERON unique?

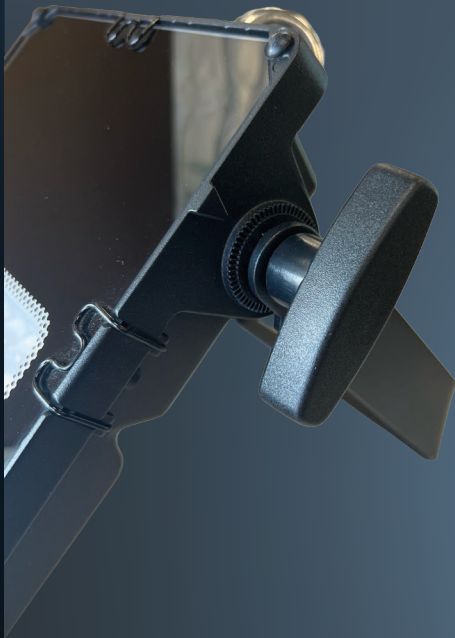


## Easy to install

The lamps can be easily mounted in the desired position using the rotary knobs on the sides.



## Tri-color

The ERON floodlights are equipped with a switch that allows you to easily change the colour temperature between warm, neutral and cool light.

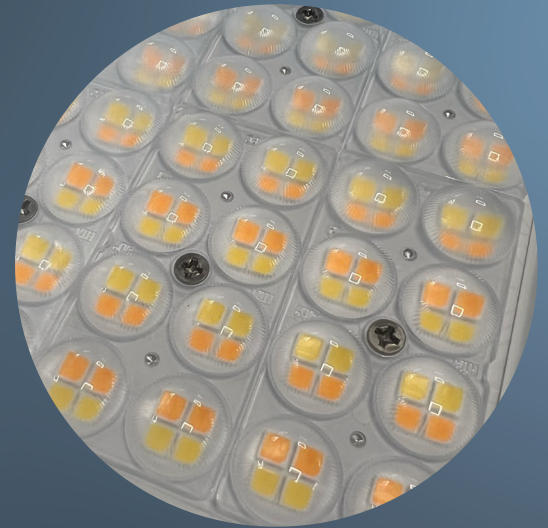


## Lenses 90°

The floodlights are equipped with 90-degree lenses, so that the light beam reaches further and spreads light more effectively.

# Floodlight cables, clips & safety

## POWERCON CABLES



Power cable PowerCon  
(200 cm / EU plug)



Connection cable PowerCon  
(500 cm)


## TRANSPORT RACKS



Transport Rack  
(9 tubes)



Transport Rack  
(12 tubes)



Transportbox Floodlight  
(5x ERON 100)

## TRUSS CLAMPS



Easy Truss clamp  
(Silver)



Easy Truss clamp  
(Black)



Banner Pipe  
(30 and 40 cm truss,  
max 1700 mm length)

## SAFETY CABLE



Safety cable + Second  
link 60 cm


## DIFFUSE PANEL



Diffuse Panel RENO  
(150 W)



# PAR-lights



# ODIN 200

200W PAR lamp with Fresnel lens for an adjustable light beam. The colour temperature can be adjusted stepwise to create the right atmosphere.



PowerCon In - Out



DMX 512

## 2700K - 6000K

- ✓ *ADJUSTABLE COLOR TEMPERATURE*
- ✓ *FRESNEL LENS*
- ✓ *DIMMABLE*
- ✓ *DMX 512*



More information

## Specifications

<b>Power</b>	200 W	<b>Input voltage</b>	AC 100 - 240V
<b>CRI</b>	>96	<b>Size</b>	390 x 229 x 236 mm
<b>Beam angle</b>	25° - 65°	<b>Weight</b>	4.5 kg
<b>Max. linkable</b>	6	<b>Barndoors</b>	Included



# ODIN 200 RGB

Compact 200W RGB PAR light with Fresnel lens for an adjustable beam angle, tunable with all RGB colours that can be adjusted manually or with a preset.



PowerCon In - Out



DMX 512



RGB

## RGB (3000K - 8000K)



- ✓ *ADJUSTABLE BEAM ANGLE*
- ✓ *DIMMABLE*
- ✓ *POWERCON IN + OUT*
- ✓ *DMX 512*



More information

## Specifications

Power	200 W	Input voltage	AC 100 - 240V
CRI	>85	Size	390 x 229 x 236 mm
Beam angle	25° - 65°	Weight	4.5 kg
Max. linkable	6	Barndoors	Included

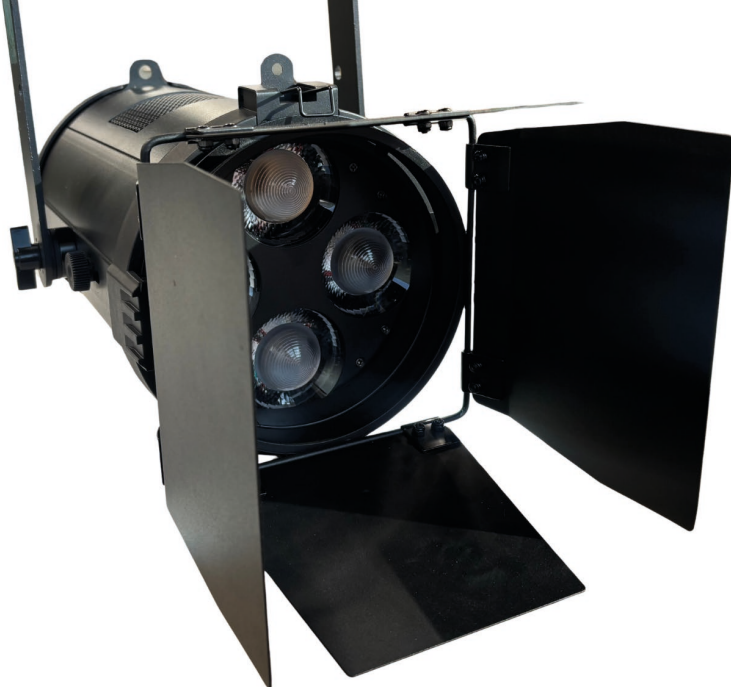

# ODIN 300

Powerful 300W PAR lamp with Fresnel lens for an adjustable light beam. Both dimmable and smoothly adjustable colour temperature to create the right focus and atmosphere.



PowerCon In - Out



DMX 512

## 2700K - 6000K

- ✓ 300 WATT
- ✓ FRESNEL LENS
- ✓ ADJUSTABLE COLOR TEMPERATURE
- ✓ POWERCON IN + OUT



More information

## Specifications

Power	300 W	Input voltage	AC 100 - 240V
CRI	>96	Size	468 x 229 x 236 mm
Beam angle	20° - 60°	Weight	5.4 kg
Max. linkable	6 - 10 meters	Barndoors	Included

# What makes the ODIN Series unique?

The parlights that do more than shine — they connect, adapt and install with ease, turning every setup into a showstopper.



## **Barndoors**

The light beam can be focused using the barn doors.



## **DMX 512**

Suitable for operation with a DMX controller



## **PowerCon In - Out**

Easy to interconnect the floodlights with an input and output



## **Fresnel lens**

The Fresnel lens offers an adjustable beam, for flexible and precise lighting.

20° - 25°

60° - 65°



## **Smart and simple operation**

With the digital display and clear buttons, you can set the lamp exactly as you want it. Plug and play.

Perfect for quick installations on site.

# PAR Light cables, clips & safety



Power cable PowerCon  
(200 cm / EU plug)



Connection cable PowerCon  
(500 cm)

## TRANSPORT CASE



Flight Case Parlight 8x  
(ODIN 200, ODIN 200 RGB)



Flight Case Parlight 8x  
(ODIN 300)

## TRUSS CLAMPS



Easy Truss clamp  
(Silver)



Easy Truss clamp  
(Black)



Banner Pipe  
(30 and 40 cm truss,  
max 1700 mm length)

## SAFETY CABLE



Safety cable + Second  
link 60 cm



ERON

**exposupply**

Your key exhibition supplier

[www.exposupply.com](http://www.exposupply.com)

[www.exposupply.de](http://www.exposupply.de)

[www.exposupply.fr](http://www.exposupply.fr)

[www.exposupply.nl](http://www.exposupply.nl)